



# Ridgy

## Architectural LED Troffer

### Product Features

- High system efficacy up to 141 lm/W
- UGR <19 luminaire ideal for interior lighting
- High quality of light in 3000K CRI 80 (3 steps MacAdam)
- Versions available for 600x600 and 625x625 ceilings
- Unique optical design with micro prismatic diffuser
- Up to 4 x 24 W linear fluorescent replacement
- Reliable quality, manufacture capability and global logistics by Delta Group 45-year establishment

### Applications



Offices



Commercial



Library





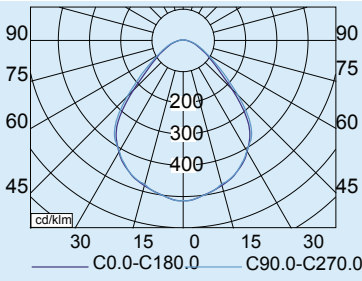






Healthcare

[www.delta-emea.com](http://www.delta-emea.com)



**DELTA**  
Smarter. Greener. Together.

	D02FRNS63P	D02FRNS64P	D02FRNS13P	D02FRNS14P	D02FRNL13P	D02FRNL4P
Type of Product	Office Lighting Solution					
Lumen Output (lm)	3000	3100	4100	4250	4100	4250
Input Voltage (V)	AC 220 / 240 V					
Power (W)	22	22	31	31	31	31
Efficacy (lm/W)	136	141	132	137	132	137
CRI (Ra)	>80					
CCT (K)	3000	4000	3000	4000	3000	4000
Power Factor	>0.90					
Operating Temp (°C)	-20° C / +35° C					
Options	1-10 V / Dali / 3h Emergency					
Lifetime	50000 hr / L 80					
Warranty	5 Years					
Conformity	IEC Class I					
Dimension	595 x 595				295 x 1195	
Dimension (on request)	622 x 622				310 x 1245	
Weight (kg)	3.1				3.3	
Dimensions (mm)	RIDGY - S - 595 x 595 		RIDGY - L - 295 x 1195 			
	RIDGY - S - 622 x 622 (on request) 		RIDGY - L - 310 x 1245 (on request) 			
Photometry						
	4250 lm 4000 K UGR <19					

## Delta Electronics Europe

Zandsteen 15  
 2132 MZ Hoofddorp, The Netherlands  
 TEL: +31-20-655-0900  
 FAX: +31-20-655-0999

For more product information and sales inquiries,  
 please contact [sleu@delta-europe.com](mailto:sleu@delta-europe.com)  
[www.delta-emea.com/ledlighting](http://www.delta-emea.com/ledlighting)

Specifications are subject to change without notice.

2016 ver.en-1.0

